

Ducane[®]
**AIR CONDITIONING
AND HEATING**
The difference is Quality.



FITS-ALL 92V™

G A S F U R N A C E

UPFLOW/HORIZONTAL-LEFT

When choosing a gas furnace, choose one built to last with a variable speed motor that is designed to save energy and reduce temperature swings for extra comfort. The Ducane Fits-All 92V gas furnace provides efficient performance guaranteed to keep you comfortable.



FITS - ALL 92V™ GAS FURNACE

UPFLOW/HORIZONTAL-LEFT

SAVES ENERGY FOR REAL VALUE

The stainless steel secondary heat exchanger captures heat wasted in older furnaces and puts it to work. A variable speed motor and two-stage gas control system keep temperature even and use just the amount of energy necessary to keep you warm and comfortable. In many cases your new Ducane furnace may be more than 60% more efficient than your old unit.


SURROUND YOURSELF WITH COMFORT

Whisper burners, dynamically balanced blower wheel and 100% sealed combustion are uncommonly quiet. The rugged, heavy-gauge steel cabinet with premium insulation keeps sound in and your furnace looking good for years. The field-proven hot surface ignition system provides reliable, efficient heat when you need it, with no more pilot lights to blow out.

BUILT TO LAST

Durable, high-quality Crimp-Tite™ aluminized steel heat exchanger resists corrosion with crimped seams for a leak-free seal that's more reliable than conventional welding.

VARIABLE BLOWER SPEED OPERATION

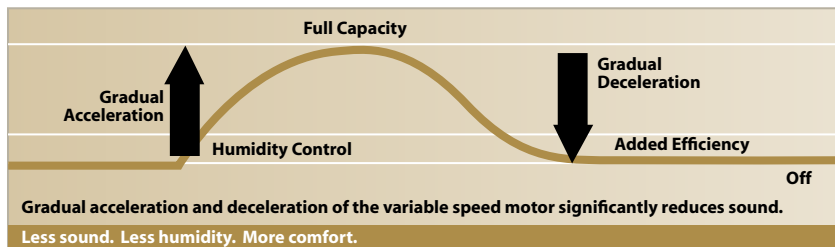

With the ability to start gradually and run at a reduced speed, the variable speed fan motor allows air to flow evenly and consistently throughout the home. This ensures greater energy efficiency and helps maintain an even temperature in all rooms – regardless of location.

UNIT SPECIFICATIONS

MODEL NUMBER	LENGTH (INCHES)	WIDTH (INCHES)	HEIGHT (INCHES)	HEATING INPUT
UPFLOW/HORIZONTAL-LEFT				
CMPEV050U3	29-1/2	13-1/2	47-3/8	50,000
CMPEV075U3	29-1/2	13-1/2	47-3/8	75,000
CMPEV100U4	29-1/2	17	47-3/8	100,000
CMPEV125U5	29-1/2	20-1/2	47-3/8	125,000

DUE TO OUR POLICY OF CONTINUOUS IMPROVEMENT, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE



Our gas efficiency AFUE ratings are certified by the Gas Appliance Manufacturers Association.



- ☒ **92.1% AFUE**
- ☒ **Heating input range from 50,000 – 125,000 Btuh**
- ☒ **Variable speed motor and two-stage gas control system**
- ☒ **Crimp-Tite™ crimped aluminized steel heat exchanger with limited lifetime warranty on heat exchanger, five-year limited warranty on components (see warranty certificate for details)**
- ☒ **Stainless steel secondary heat exchanger maximizes durability and efficiency**
- ☒ **Upflow/horizontal-left application flexibility**
- ☒ **Operational with a single-stage or two-stage thermostat**
- ☒ **Field selectable low fire run time**
- ☒ **Adjustable air flow in 200 CFM increments**
- ☒ **Motor maintains a constant CFM when heavily loaded with duct or filter static**
- ☒ **Humidifier connection (115V)**
- ☒ **Time-delay for air conditioner SEER enhancement**
- ☒ **Troubleshooting is fast and accurate with LED diagnostics**
- ☒ **Direct 115V hot surface ignition system**
- ☒ **CSA-certified for U.S. and Canada**

Ducane®
AIR CONDITIONING
AND HEATING

The difference is Quality.

www.ducanehvac.com

